



OTX SPYRO

100 Series

TST - TSTE ON floor hopper

The 100 series of the OTX extends the range up to 19,200 dm³ of capacity. Insulated with a 100 mm thickness they are suitable for working up to 200 °C. The SPYRO finishing makes the hoppers shockproof. They are completed with modular frames prearranged to accept filters and external heating groups. The European version is equipped with entry stairs, parapets and raised edges. OTX is equipped with openable cone, it's not necessary to explain the advantages of this equipment. OTX is a patented model.

OTX serie 100 estende la gamma fino a 19.200 dm³ di capacità. Coibentate con uno spessore di 100 mm sono adatte per lavorare fino a 200 °C. Il profilo SPYRO le rende immuni agli urti. Vengono completate con telai modulari predisposti per accettare filtri e gruppi di riscaldamento esterni. In versione Europa sono dotate di scale di accesso, parapetti, battipiedi. OTX ha il cono apribile, non è necessario spiegare i vantaggi di questa dotazione. OTX è un modello depositato.

- Shockproof SPYRO
- Openable cone
- Enlarged door
- SPYRO antiurto
- Cono apribile
- Porta maggiorata



Openable cone for OTX 100 series.
Cono apribile della serie OTX 100.

designed by Moretto



PLASTICS AUTOMATION



DRYING



OTX
ORIGINAL THERMAL EXCHANGER

ENGLISH / ITALIANO

Spyro




OTX SPYRO

30 - 40 Series

The new OTX hopper presents the exclusive geometry which solves the falling flow problems of the granule and permits to get a more uniform ppm moisture in less time. The series 30 and 40 are available for small and medium productions. The OTX hoppers have the particular Spyro finishing, an exclusive covering that makes the hopper shockproof. Inside back filter, viewer and enlarged door are standard devices which make the hopper a machine unrivaled.

La nuova tramoggia OTX presenta un'esclusiva geometria che risolve il problema dei flussi di caduta del granulo plastico, consentendo di ottenere un'umidità in ppm uniforme ed in un tempo più contenuto. Disponibili nella serie 30 e 40 per le piccole e medie produzioni, le tramogge OTX presentano il particolare profilo Spyro, un esclusivo rivestimento rende la tramoggia immune agli urti. Filtro di ritorno interno, viewer e porta allargata sono dotazioni standard che rendono la tramoggia una macchina ineguagliabile.

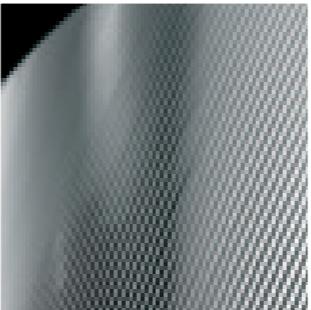

**Shockproof
SPYRO**



Inside back Filter




VIEWER



Enlarged door

CONVENTIONAL

OTX

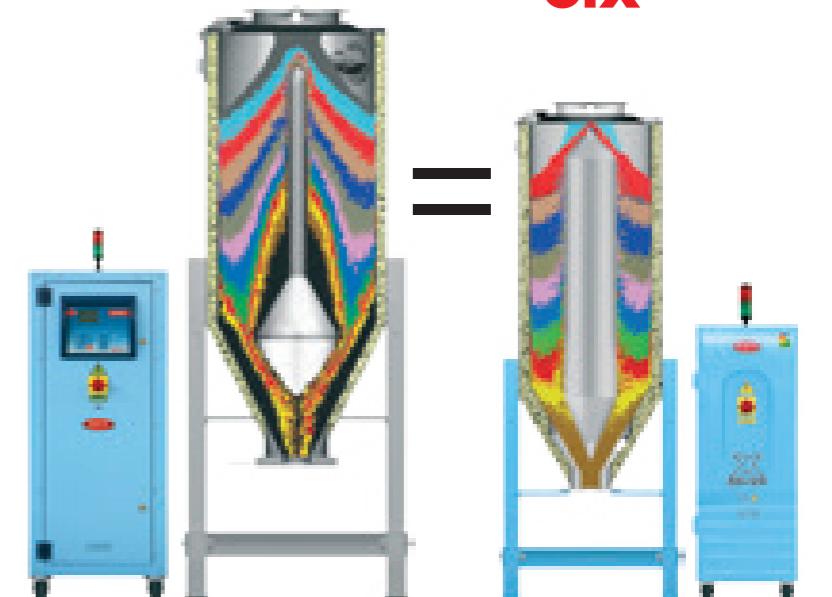

example:
PC 50 kg/h
3 h
100 m³
300 l

PRODUCTION
TIME
AIRFLOW
CAPACITY

example:
PC 50 kg/h
2 h
60 m³
180 l

-40%
-40%
-40%